


### 2.3.23. Produmex batch attribute types (PMX\_BATT)

The defined batch attribute types can be added to items in the Item Master Data window > Produmex tab > Attributes > Batch Attribute Code drop-down menu.

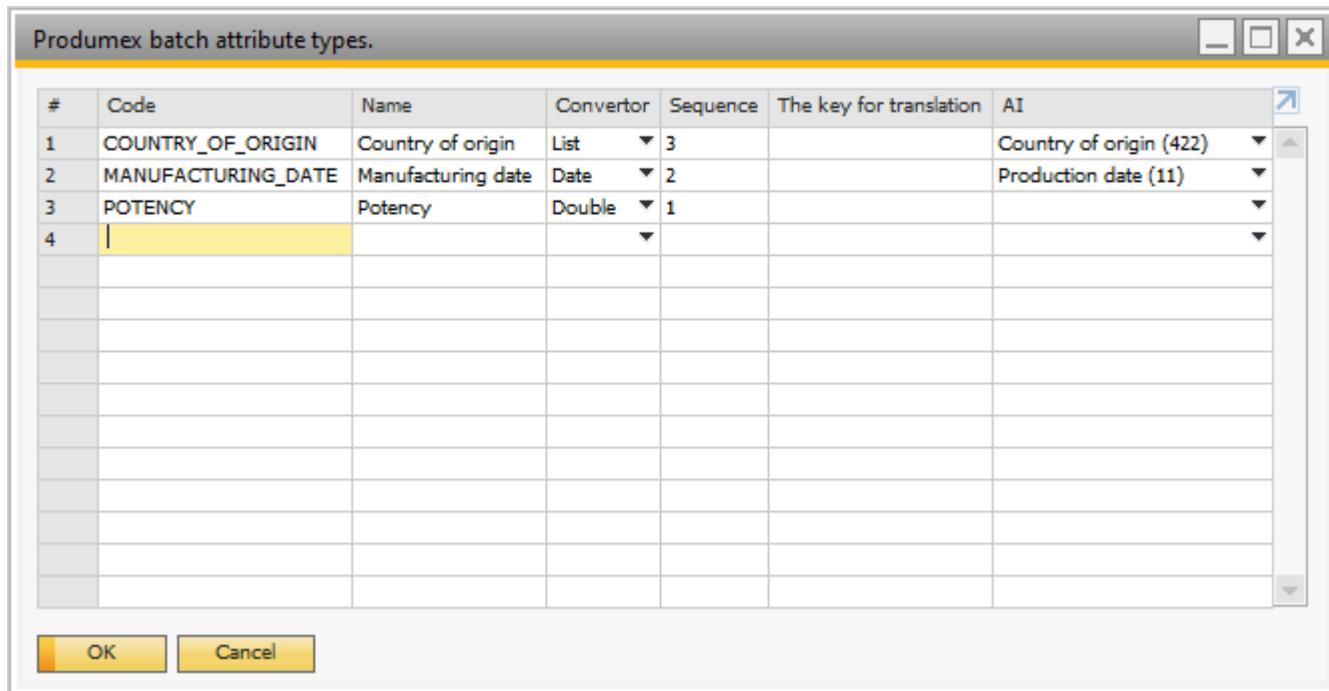

#### **Convertor**

The data is stored in the database as text. The system needs to know what type to convert it to. This can be set with the convertor.

Possible values:

- Int
- String
- Date
- Double
- List

#### **Sequence**

The sequence of the defined batch attribute types in the Batch Attribute Code drop-down menu.

#### **The key for translation**

The key that will be used for the translation of the title. When this is not set, the system will use MSG\_TITLE\_BATCH\_ATTRIBUTE.<Code of the batch attribute>. In case there is only 1 language in the company, a title can be entered here directly.

A list of possible batch attributes that can be linked to an item.

Some predefined codes have been added:

- COUNTRY\_OF\_ORIGIN: Country of origin
- MANUFACTURING\_DATE: Manufacturing date

When custom batch attribute types are added, a translation should be added to the system. This translation is used on a device when entering the batch attributes.

The translation node for COUNTRY\_OF\_ORIGIN looks like:

```

<PmxLocalizationKey>
    <Canceled>False</Canceled>
<LocalizationKey>MSG_TITLE_BATCH_ATTRIBUTE.COUNTRY_OF_ORIGIN</LocalizationKey>
    <ApplicationTypeCode>SLIM_SCR</ApplicationTypeCode>
    <LocalizationProperties>
        <PmxLocalizationProperty>
            <Canceled>False</Canceled>
            <LocalizationProperty />
            <ExtensionCode>CONVSTR</ExtensionCode>
            <LocalizationValues>
                <PmxLocalizationValue>
                    <Canceled>False</Canceled>
                    <LocalizationValue>Enter the country of origin</LocalizationValue>
                    <LanguageCode>3</LanguageCode>
                </PmxLocalizationValue>
                <PmxLocalizationValue>
                    <Canceled>False</Canceled>
                    <LocalizationValue>Vul het land van herkomst in</LocalizationValue>
                    <LanguageCode>16</LanguageCode>
                </PmxLocalizationValue>
            </LocalizationValues>
        </PmxLocalizationProperty>
    </LocalizationProperties>
</PmxLocalizationKey>

```

The LocalizationKey starts with 'MSG\_TITLE\_BATCH\_ATTRIBUTE.'

Add the code of the attribute type at the end.

When making a complete valid translation file to import, make sure the root tags are also added:

```

<?xml version="1.0" encoding="utf-8"?>
<TestRoot>
</TestRoot>

```

## AI

The application identifier. It allows a scanned value from a barcode to be automatically stored in the batch attributes.

From:

<https://wiki.produmex.name/> - **Produmex**



Permanent link:

<https://wiki.produmex.name/doku.php?id=implementation:wms:batt>

Last update: **2021/03/03 12:29**